



# Colourful and Connected LED All-in-One Printer

Fast printing with flexible connectivity

**MFC-L3760CDW**



PRINT



SCAN



COPY



FAX



5GHz  
WIRELESS

[www.brother.eu](http://www.brother.eu)

## All-in-One Colour Wireless LED Printer

The colourful and connected MFC-L3760CDW is expertly engineered to quietly deliver high-quality documents without compromising on speed.

A generous paper tray capacity and large Automatic Document Feeder allow you to multitask with ease and keep your office running smoothly.

### MFC-L3760CDW



### Key features:

- Print up to 26 pages per minute
- 2-Sided print, up to 10 sides per minute
- Scan up to 21 images per minute<sup>3</sup>
- 8.8cm Colour touchscreen
- Gigabit ethernet, 5GHz WiFi and USB
- Print or scan directly from desktop, USB or mobile app
- 512MB Internal memory
- 50 Sheet Automatic Document Feeder (ADF)<sup>11</sup>
- 250 Sheet paper input tray<sup>11</sup>
- Comes with 1,000 black, 1,000 colour page yield toners, 2,300 black, 3,000 colour maximum yield available<sup>8</sup>

### Quiet without compromise

Print quietly without having to compromise on speed or quality. The MFC-L3760CDW prints full colour pages quickly and flawlessly whilst still being quieter than your average office conversation, making this device perfect for desktop working.

### Save time

The expertly designed MFC-L3760CDW has a high capacity paper input and output tray allowing you to print without interruption. The Automatic Document Feeder and 2-sided print feature save you time, enabling you to get on with other tasks.

### Effortless

Make your day easier and your printing effortless, with simple set up and gigabit ethernet, 5GHz WiFi or USB connection. This efficient MFC-L3760CDW is a breeze to operate using the easy to navigate menu on the 8.8cm colour touchscreen. Benefit from the ability to create custom shortcuts on the touchscreen for your most used functions.

## Secure by design

To keep pace with the ever-evolving legislation on privacy and data security, our devices offer the latest industry-standard security features to securely protect your data. Our security experts continuously research new enhancements to products, solutions and services to proactively ensure all our products are 'secure by design'.

The MFC-L3760CDW provides a range of robust features. It uses triple-layer security at a device, network and document level. This offers added peace of mind and guarantees that the integrity of your data is maintained at every step.

## Print from anywhere



With Brother Mobile Connect, you can fully operate your Brother printer from your fingertips. Print and scan documents on the move and order genuine Brother supplies straight to your door. You can also personalise your frequently used features and unlock a revolutionary way of printing from your mobile device.


Download the app on your mobile device to get started.



## The automated toner subscription for your printer

Whether you print a little or a lot, we have a flexible printing subscription plan to suit everyone. You can sign up and enjoy toner supplies delivered automatically with free postage direct to your doorstep.

Benefit from ongoing printer warranty cover, free toner recycling and first-class customer support. Subscribe to a better way to print.

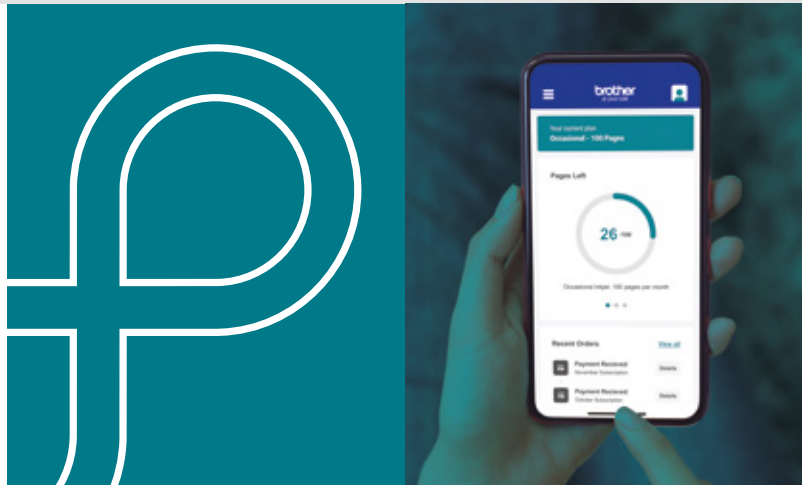

## TO FIND OUT MORE

Download the Brother Mobile Connect app or visit the website: [brother.co.uk/ecopro](https://brother.co.uk/ecopro)



## General

### Technology

Electrophotographic LED

### Memory

512MB

### Control panel

8.8cm Colour  
Touchscreen LCD

### Local Interface

Hi-Speed USB 2.0,  
USB 2.0 Host (Front)

### Wired Network

Gigabit Ethernet

### Wireless Network

2.4GHz and 5GHz Support

### Carton Contents

Device, Inbox Toners, Drum Unit, Belt Unit, Waste Toner Box, Power Supply Cord, Quick Set-Up Guide, Warranty Card

## Print

### Print Speed (A4)

1-Sided: 26ppm Mono/Colour  
2-Sided: 10 sides per minute  
Mono/Colour

### FPOT (First Print Out Time)

Up to 13.5 Seconds  
Mono/Colour

### Quiet Mode

A mode to reduce the printing noise

### Resolution

Up to 600 x 2400dpi

### Print Languages

PCL5e, PCL5c, PCL6 (PCL XL Class 3.0), BR-Script3, PDF Version 1.7

### Embedded Fonts (PCL)

73 scalable fonts,  
12 bitmap fonts

### Embedded Barcodes (PCL)

16 bar codes\*

\*Code39, Interleaved 2 of 5, FIM (US-PostNet), Post Net (US-PostNet) EAN-8, EAN-13, UPC-A, UPC-E, Codabar, ISBN (EAN), ISBN (UPC-E), Code128 (set A, set B, set C), EAN128 (set A, set B, set C), Code93, GS1Databar, MSI

### Embedded Fonts (Postscript)

66 scalable fonts

## Printer Functions

### N-up Printing

Reduce up to 25 pages into a single page

### Poster Printing

Enlarge a single page into a poster using 2x2, 3x3, 4x4 or 5x5 pages

### Toner Save Mode

Use the Toner Save Mode to reduce toner consumption without affecting print speed

### Watermark Printing

Watermark your documents with predefined text, custom logo or custom messages

### ID Printing

Add identification to your printed documents (date and time, short custom message or PC username)

### Booklet Printing

Print documents in A5 booklet format using automatic or manual 2-sided print

### Print Profiles

Store your favourite driver settings as profiles to easily recall them

### Direct Print

Print directly from a USB flash memory drive. Supported formats include; PDF 1.7, JPEG, Exif+JPEG, PRN (created using printer driver of model), TIFF (scanned using brother model)

### Manual 2-Sided Print

Manual 2-sided printing (recommended for media not supported by automatic 2-sided print)

### Reverse Print

Rotate the content of a printed document by 180°

### Print Complete Notice

A printing notification can be set to go to your computer (Network only)

### Secure Print

Protect print jobs with a 4 digit release code required at the device in order for them to be printed

### Universal Print (Microsoft 365)

Print effortlessly with native Universal Print support on Brother printers

## Printer Driver

### Windows

Windows 11  
(32 and 64 bit editions)  
and more

### macOS

Printing via macOS requires the use of AirPrint. Mac drivers are not provided.

### Linux

CUPS, LPD/LPRng  
(x86/x64 environment)

### ChromeOS

Supports native  
ChromeOS printing

### PCL Driver

PCL6 (Standard)

### Universal Printer Driver

Driver for Windows that enables you to print to any network or locally connected Brother printer

Visit [support.brother.com](http://support.brother.com) for the full list of supported OS and to download the latest drivers and software.

## Paper Handling<sup>11</sup>

### Paper Input Standard Tray

250 Sheets

### Manual Feed Slot

1 Sheet

### Automatic Document Feeder (ADF)

50 Sheets

### Paper Output

150 Sheets A4

### Envelope Printing

Yes from manual feed slot

### Media Sizes Standard Tray

A4, Letter, Legal, Mexico Legal, India Legal, Executive, A5, A5 Long Edge, A6, B5 (JIS), B5 (ISO), B6 (JIS), A4 Short (270mm), Folio, 16K (195x270mm)

### Manual Feed Slot

Width 76.2 to 216 mm  
Length 116 to 355.6 mm  
Envelope; COM-10, DL, C5, Monarch

### ADF

Width 105 to 215.9 mm  
Length 147.3 to 355.6 mm

### Scanner Glass

Up to A4/Letter

### Auto 2-Sided

A4

### Media Type and Weights Standard Tray

Plain Paper, Thin Paper, Thick Paper, Recycled Paper, 60 to 163g/m<sup>2</sup>

### Manual Feed Slot

Plain Paper, Thin Paper, Thick Paper, Recycled Paper, Bond, Label, Envelope, Env. Thin, Env.Thick, Glossy Paper, 60 to 163g/m<sup>2</sup>

### ADF

Plain Paper, Thin Paper, Recycled Paper, 60 to 105 g/m<sup>2</sup>

### Auto 2-Sided

Plain Paper, Thin Paper, Recycled Paper, 60 to 105g/m<sup>2</sup>

## Mobile and Web Connectivity

### Brother Mobile Connect<sup>17</sup> (Android)

Print from, scan to, preview copies and check the machine status from an Android device

### Brother Mobile Connect<sup>17</sup> (iPad / iPhone)

Print from, scan to, preview copies and check the machine status from an iPad / iPhone

### Apple AirPrint<sup>17</sup>

Print from and scan to most common file types from any AirPrint enabled application

### Brother Print Service Plugin<sup>17</sup>

Print from an Android device without a dedicated App.

### Mopria™<sup>17</sup>

Print most common file types from Mopria™ supported Android devices

### Brother Apps<sup>18</sup>

Scan to Mobile, Scan to Searchable PDF, Fax forward to Cloud/E-mail, Scan to PowerPoint, Scan to Excel, Scan to Word, Easy scan to E-mail

### Web Connect<sup>18</sup>

Print from and scan to without using a PC on Box, Dropbox, Evernote, OneDrive, Google Drive™ OneNote

## Copy

### Copy Speed (A4)

1-Sided: 26ppm Mono/Colour

### Resolution

Up to 600 x 600dpi

### FCOT

#### (First Copy Out Time)

Up to 15.5 Seconds

Mono/Colour

### Grey Scale

256 shades of grey  
(8 bit for each colour)

## Copy Functions

### Multi-Copying/Stack/Sort

Makes up to 999 copies of each page / Stacks or Sorts

### Enlargement/Reduction Ratio

Reduce or Increase document sizes from 25% to 400% in 1% increments

### 2 in 1 ID Copying

Allows the user to copy both sides of an ID card to a single A4 sheet

### N in 1 Copying

Allows the user to compress 2 or 4 pages on to a single A4 sheet

## Scan

### Scanner Type

CIS (Contact Image Sensor)

### Colour and Mono Scanning

Yes

### Scan Speed (A4)<sup>3</sup>

1-Sided: 27ipm Mono and 21ipm Colour

### Scan Resolution from ADF

600 x 600dpi

### Scan Resolution from Scanner Glass

1200 x 1200dpi

### Interpolated Scan Resolution

Brother Scanner Utility enhances up to 19,200 x 19,200 dpi

### Colour Depth

48 bit colour processing (Input)  
24 bit colour processing (Output)

### Grey Scale

16 bit colour processing (Input)  
8 bit colour processing (Output)

## Scanner Functions

### Supported File Formats

Including PDF (PDF/A, Secure PDF, Signed PDF, Searchable<sup>17</sup>) JPEG, TIFF, XPS

### Standard Functions<sup>17</sup>

Scan to USB, E-mail, OCR, Image and File

### Network Scanning

Scan to network folder (SMB)<sup>16</sup>, FTP, Email Server, SharePoint (On Premise)

### Direct Scan

Scan directly to a USB flash memory storage

### Scan Features

Auto Deskew from ADF, Rotate Image<sup>16</sup>, Colour Drop<sup>16</sup>, Character Correction<sup>16,17</sup>, Edge Emphasis<sup>16</sup>, Edge Fill<sup>16,17</sup>, Skip Blank Page

### Scan To Microsoft Office

Scan to Word (.docx), PowerPoint (.pptx), Excel (.xlsx) for Microsoft Office

### Scan Profile<sup>15</sup>

Create up to 25 preset network, FTP/Sharepoint profiles for an easy way to store multiple scan settings

### Document Separation

Create scanned files based on blank sheet separation or a specific number of single sided images or sheets of paper, even if more documents are set on the ADF

## Scanner Drivers

### Windows

TWAIN and WIA  
Windows 10  
(32 and 64 bit editions)

### macOS

Scanning via macOS requires the use of AirPrint. Mac drivers are not provided.

### Linux

SANE (32 and 64 bit editions)

### ChromeOS

Supports native ChromeOS scanning

Visit [support.brother.com](http://support.brother.com) for the full list of supported OS and to download the latest drivers and software.

## Fax

### Fax Modem

33,600bps (Super G3)

### Grey Scale

256 shades (8 bit) of grey are available for faxing

### Out of Paper Reception

Up to 500 pages  
(ITU-T Test Chart, Standard Resolution, JBIG)

### Broadcasting

Send the same fax message up to 250 locations

### Memory Transmission

Up to 500 pages  
(ITU-T Test Chart, Standard Resolution, JBIG)

## Fax Functions

### Internet Fax (I-Fax)

Fax documents over the internet as an email attachment

### Fax to Server

Scan a document and send it over the network to a separate fax server

### Automatic Redial

Automatic redialling if the recipient fax is busy

### Telephone Index

An electronic, alphabetical listing of stored speed dials and group numbers

### Chain Dialling

Allows the user to store parts for long dialing sequences in different speed dial locations

### Batch Transmission

Stores documents for the same location in the machines memory for transmission in a single call

### Fax Forwarding

Sends a fax received in memory to another pre-programmed fax number

### Remote Retrieval

Allows users to remotely access their machine and retrieve stored fax messages

### Fax Stamp

Add the date and time to all received faxes

### Cover Page

Create custom cover pages for outgoing faxes

### Station ID

An ID and fax number will be printed as the header of every fax sent

### PC-Fax Send<sup>15,18</sup> and Receive<sup>16,18</sup>

Send and Receive faxes directly from your PC. Supports mono only

### Distinctive Ring Detection

An external service that allows two or more telephone numbers shared on a single fixed line and use different ring tones (UK and Denmark only)

### Error Correction Mode (ECM)

Detect line errors during fax transmission and resend the page(s) of the document that had an error (recipient machines must share this feature for it to work)

### Auto Reduction

When receiving a single page document longer than A4 (297mm) the fax machine will automatically reduce the message to fit onto a single A4 sheet

## Fleet Management Tools

### BRAdmin<sup>16,17</sup>

LAN/WAN management software

### Embedded Web Server

Web based print management software embedded onto the device

### Status Monitor<sup>16</sup>

Monitor the status of your machine from your computer

### Driver Deployment Wizard<sup>16,17</sup>

Easily create print drivers for hassle free deployment over your network

## Software

### Brother iPrint&Scan Desktop<sup>15,17</sup>

Print from, scan to, preview copies and check the machine status from Windows or macOS PC

### PaperPort SE 14<sup>16,17</sup>

Document management and sharing program from KOFAX

### Utilities

Provides setup guides, manual, FAQ, troubleshooting and contact to Brother customer service

### Easy Setup

Simple access to drivers and software for the installation of your Brother machine from [support.brother.com](http://support.brother.com)

## Connectivity

### Wired Network

Gigabit Ethernet (10Base-T/100Base-TX/1000Base-T)

### Wireless Network

2.4GHz: IEEE 802.11 b/g/n (Infrastructure Mode)  
IEEE 802.11 g/n (Wi-Fi Direct)

5GHz: IEEE 802.11 a/n (Infrastructure Mode)

IEEE 802.11 a/n (Wi-Fi Direct)

### Wi-Fi Direct<sup>®</sup>

Print wirelessly without having to go through a wireless access point (both automatic and manual methods supported)

### Wireless Setup Support

Wi-Fi Protected Setup (WPS)

### Wireless Applications

Vertical Pairing

### Mobile

Print or scan from your mobile device with Brother Mobile Connect, Airprint, Mopria

### Local Interface

Hi-Speed USB 2.0, USB 2.0 Host (Front)



## Security Features

### Wired Network Security

APOP, SMTP-AUTH, SSL/TLS (IPP, HTTP, SMTP, POP3, IMAP4, FTP), SNMP v3, 802.1x (EAP-MD5, EAP-FAST, PEAP, EAP-TLS, EAP-TTLS), Kerberos, IPsec

### Wireless Network Security

WEP 64/128 bit, WPA-PSK (TKIP/AES), WPA2-PSK (TKIP/AES), WPA3-SAE (AES)  
\*Wi-Fi Direct supports WPA2-PSK (AES) only.

APOP, SMTP-AUTH, SSL/TLS (IPP, HTTP, FTP, SMTP, POP3, IMAP4), SNMP v3, 802.1x (EAP-FAST, PEAP, EAP-TLS, EAP-TTLS), Kerberos, IPsec

### IPv4

ARP, RARP, BOOTP, DHCP, APIPA(Auto IP), WINS/NetBIOS name resolution, DNS Resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/Port9100, POP3, SMTP Client, IPP/IPPS, FTP Client and Server, CIFS Client, TELNET Server, SNMPv1/v2c/v3, HTTP/HTTPS server, TFTP client and server, ICMP, Web Services (Print/Scan), SNTP Client, LDAPS, IMAP4, Syslog

### IPv6

NDP, RA, DNS resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/Port9100, IPP/IPPS, POP3, SMTP Client, FTP Client and Server, CIFS Client, TELNET Server, SNMPv1/v2c/v3, HTTP/HTTPS server, TFTP client and server, ICMPv6, SNTP Client, LDAPS, Web Services (Print/Scan), IMAP4, Syslog

### IP Filter

Restrict which network users can or cannot access the device over the network (IPv4 only)

### Secure Print

Protect print jobs with a 4 digit release code required at the device in order for them to be printed

### E-mail Notifications

Automatically have the device send e-mail alerts when it requires attention, such as when the toner is low or needs replacing

### E-mail Reports

Receive usage reports on a regular basis via e-mail

### Automatic Intrusion Detection

All Brother Print devices are secure by design. Devices automatically recognise security attacks and take preventative measures, including rebooting where necessary, to ensure the device remains secure

### Firmware Updates

In addition to allowing automatic update alerts to install the latest version the printer can be set to not receive older firmware versions to avoid downgrade by an unauthorised user

### Cloud Secure Print

Enables password protected driverless print job release

### Setting Lock

Secures access to the devices control panel by locking it

### Certificate Management

Use the default standard self-signed, create a custom self-signed certificate, certificate signing request (CSR), or external public certificate & private key for protected network communication

### Secure Function Lock 3.0

Use a 4 digit pin or a password to identify and authenticate an individual or groups of users over a network. Allows access control for up to 100 users

### Digitally-signed Firmware

The firmware for Brother print and scan devices is digitally signed and secure

### Syslog

Allows IT Admin to access a single application (SIEM tool) to get device status updates for audit purposes over Syslog

### On-Premise Active Directory/LDAP Authentication

Utilise existing infrastructure to restrict access to Brother devices using AD/LDAP. Staff can easily use their existing network login credentials to authenticate

### Port-based Network Access Control

(IEEE 802.1x)  
Brother devices are in full compliance with this standard, to allow connection to an 802.1x EAP (Extensible Authentication Protocol) protected network

### Restrict network protocols

The Protocol Control feature allows an administrator to restrict communication protocols (e.g. FTP, Telnet) as required

### Store Print Log

Allows audit of a print log file saved to CIFS server. Record ID, type, name, user, date, time, page count for every print job

## Supplies and Consumables

### Inbox Toner<sup>8</sup>

1 x 1,000 pages (BK)  
1 x 1,000 pages (CMY)

### Standard Yield Toner<sup>8</sup>

TN248  
1,000 pages (BK)  
1,000 pages (CMY)

### High Yield Toner<sup>8</sup>

TN248XL  
3,000 pages (BK)  
2,300 pages (CMY)

### Drum Unit

DR248CL  
Approx. 20,000 pages  
at 1 page per job

### Belt Unit

BU229CL  
Approx. 50,000 pages  
at 2 pages per job

### Waste Toner Box

WT229CL  
Approx. 50,000 pages  
at 5 pages per job

## Address Book

### LDAP

The ability to connect to an external LDAP enabled address book, like Microsoft Exchange. Compatible with LDAP and LDAPS

### Speed Dials

300 locations for E-mail addresses and fax numbers

### Group Dial

A combination of up to 20 groups can be stored for broadcasting

## Dimensions and Weights

### With Carton (WxDxH)

497 x 536 x 533mm - 23.50kg

### Without Carton (WxDxH)

410 x 444 x 401mm - 20.20kg

## Duty Cycle

### Recommended Monthly

Up to 3,000 pages

## Operating Requirement

### Power Requirement

220-240V  
AC 50/60Hz

### Operating Environment

Humidity 20 - 80 %  
10°C - 32.5°C  
50°F - 90.5°F

### Storage Environment

Humidity 35 - 85 %  
0°C - 40°C  
32°F - 104°F

## Environment

### Approx Power Consumption<sup>13,23</sup>

Copying: 560W  
Copying in quiet mode: 310W  
Printing: 560W  
Printing in quiet mode: 310W  
Ready: 70W  
Sleep: 10W  
Deep Sleep: 0.6W  
Power Off: 0.04W

### TEC Value

0.41 kWh/Week

### Sound Power<sup>12</sup>

Printing: Mono 6.41B(A)  
Colour 6.51B(A)  
Ready: Inaudible  
Quiet Mode: Mono 5.79B(A)  
Colour 5.86B(A)  
Deep Sleep: Inaudible

### Sound Pressure<sup>12</sup>

PC Printing: Approx. 47.0db(A)  
Ready: Inaudible  
Quiet Mode: 43.0db(A)

### Toner Save

This reduces the toner consumption to get more pages from your consumables

### Blue Angel

Yes

### GS Mark

Yes

- 3 Scan Speeds based on ISO/IEC 17991
- 8 Approx. declared yield value in accordance with ISO/IEC 19798
- 11 Capacity calculated with 80gsm paper
- 12 Sound pressure and sound power level in accordance with ISO 7779
- 13 Power consumption power off is measured according to IEC 62301 Edition 2.0
- 15 Windows and macOS only
- 16 Windows only
- 17 Optional download
- 18 Requires an Internet connection
- 23 Power consumption is measured using ENERGY STAR Ver 3.1 test method network configuration



Compatible with Brother's EcoPro toner subscription

**brother**  
at your side

**Working with you for a better environment**

At Brother, our green initiative is simple. We strive to take responsibility, act respectfully and try to make a positive difference to help build a society where sustainable development can be achieved. We call this approach Brother Earth.

[www.brotherearth.com](http://www.brotherearth.com)

All specifications correct at the time of printing and are subject to change. Brother is a registered trademark of Brother Industries Ltd. Brand product names are registered trademarks or trademarks of their respective companies.

**brother**  
at your side